


# SPIRALI IN RILSAN® PA11 CON TERMINALI DIRITTI

## RILSAN® PA11 SPIRALS WITH STRAIGHT TERMINALS

### SCHEDA TECNICA - SPIRALI IN RILSAN® PA11 CON TERMINALI DIRITTI

#### DATA SHEET - RILSAN® PA11 SPIRALS WITH STRAIGHT TERMINAL

Codice Code	LUNGHEZZA LENGTH						5 m		7,5 m		10 m		12 m		15 m		30 m							
	D (mm)	d (mm)	De (mm)	Di (mm)	Lt1 (mm)	Lt2 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)			
SC42XY	4	2	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000
SC425XY	4	2,5	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000
SC427XY	4	2,7	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000
SC53XY	5	3	62	52	150	150	125	425	2500	197	497	3750	270	570	5000	328	628	6000	415	715	7500	850	1150	15000
SC64XY	6	4	64	52	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SC86XY	8	6	86	70	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SC108XY	10	8	102	82	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000
SC1210XY	12	10	126	102	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000
SC1512XY	15	12	182	152	150	150	120	420	2500	195	495	3750	270	570	5000	330	630	6000	420	720	7500	870	1170	15000
SC15125XY	15	12,5	182	152	150	150	120	420	2500	195	495	3750	270	570	5000	330	630	6000	420	720	7500	870	1170	15000
SC1815XY	18	15	188	152	150	150	120	420	2500	200	500	3750	280	580	5000	344	644	6000	440	740	7500	920	1220	15000

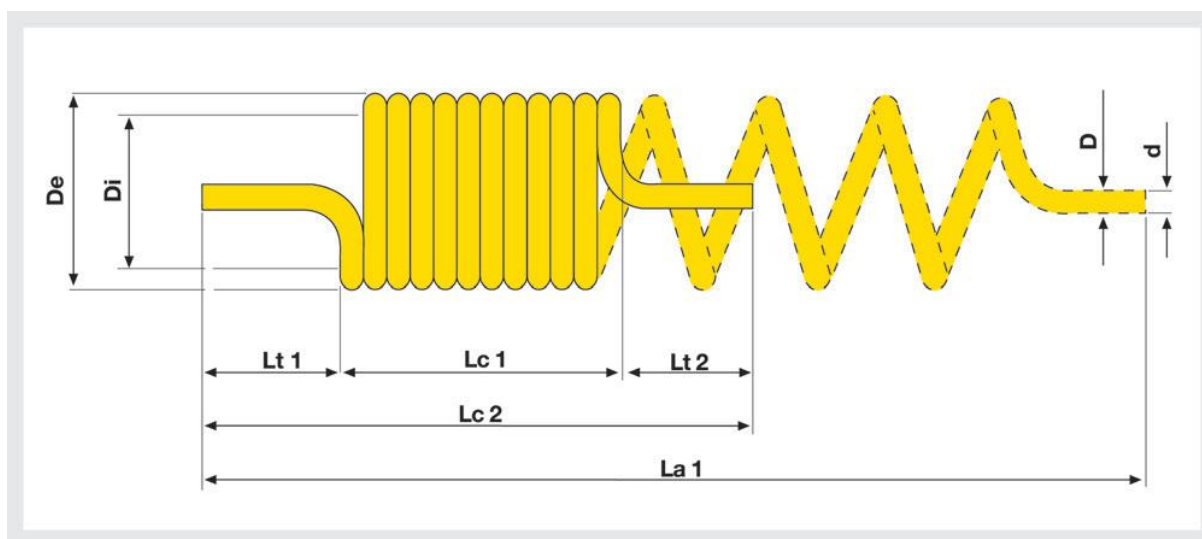

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.  
ESEMPIO CODICE: SC1210A15 - Spirale RILSAN® PA11 con codoli 12x10 ARANCIO da 15 m.  
Temperature di utilizzo: da -40°C a +80°C.  
Per fluidi a base acquosa temperatura massima di esercizio +70°C.  
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.  
CODE EXAMPLE: SC1210A15 - RILSAN® PA11 Spiral with straight terminals 12x10 ORANGE in lengths of 15 m.  
Working temperature: from -40°C to +80°C.  
Max. working temperature of fluids containing water +70°C.  
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.

